HUNTER 170



DISCOVER THE DIFFERENCE



HUNTER

Designed by the Hunter Design Team and produced utilizing the patented ACP process that combines a UV protected plastic with fiberglass mat and injected foam. This hull is five times more impact resistant than conventional construction as well as unsinkable and almost maintenance free. A wide open cockpit is comfortable for the family or friends. There is even a covered storage area forward to keep your gear dry and secure. Easy to trailer, simple to rig and fun to sail; try one out soon!

STANDARDS AND OPTIONS

RIGGING


Anodized Fractional Rig w/Spreaders 4:1 Boom Vang System Halyards & Running Rigging Mainsail 4:1 Mainsheet System Roller Furling Jib w/UV Protection

DECK/HULL/COCKPIT

ACP Structured Hull Adjustable Kick-up/Swing Centerboard **Dual Access Bow Storage** Halyard Storage Bag Integral Centerline Toe Rail Kick-up Rudder Over 1,500 lbs. of Positive Flotation Protective Rubrail Removable Storage Cover Stainless Steel Bow Eye Stainless Steel Mooring Cleats (4) Tiller Extension

OPTIONS

202 ft² Asymmetrical Spinnaker w/Hardware Kit Galvanized Custom Trailer w/Mast Crutch and Winch Launching Dolly Mainsail Cover Mast Float Motor Mount 2.5 HP Outboard Reef Points Seat Cushions Trailer Tongue Jack

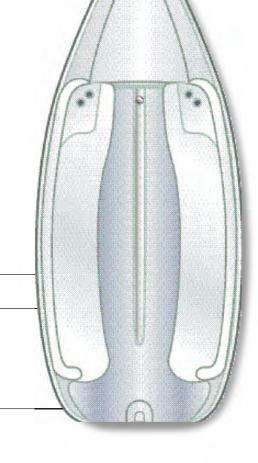

SPECIFICATIONS

Length Overall Waterline Length	17'1" · · · · · 5.18 m 14'5" · · · · · 4.39 m	Mast Height Sail Area	25'6" ·······7.77 m 150 ft² ···· 13.95 m²
Beam	7'0" ······ 2.14 m	Max Capacity	6
Draft (Board Up)	6" ····· 0.15 m	Max Power	2.5 HP ···· 1.86 KW
Draft (Board Down)	4'6" ······ 1.37 m	CE Classification	D
Dry Weight	480 lb ····· 218 kg		

Route 441 Post Office Box 1030 Alachua, Florida USA 32615 Phone (386) 462-3077 , FAX (386) 462-4077 , NATIONAL CUSTOMER HOTLINE U.S. 1-800-771-5556

www.huntermarine.com , e-mail: sales@huntermarine.com , customerservice@huntermarine.com

Hunter Marine reserves the right to modify or change, without notice, any materials, specifications, equipment and/or accessories.All measurements are approximate. Standard equipment may vary for products sold outside the United States.



9/02 12K





